


# SF-M15L/156

## 440-455W

158.75 ± 1.5 × 79.375 ± 1.5mm

Cells 156

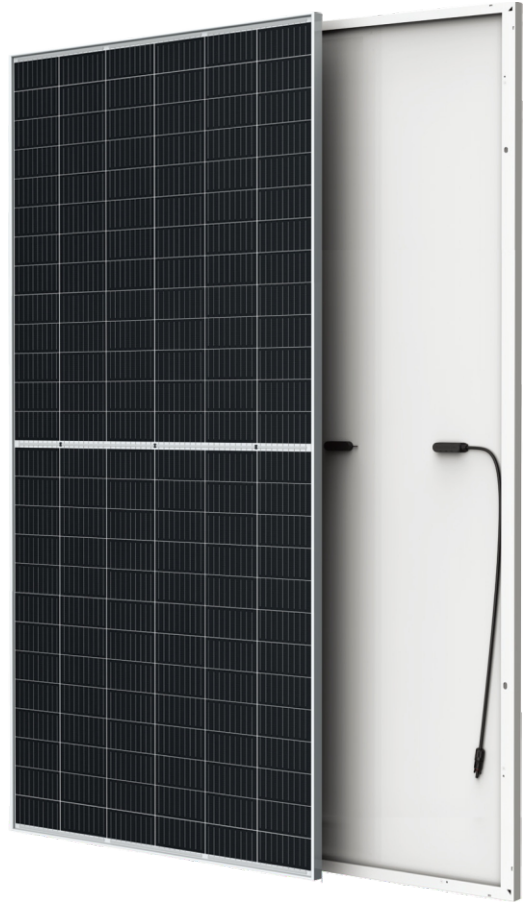

### Monocrystalline

### PERC Half-Cell Module

Max Power Out: 455W

Max Efficiency: 20.91%

Power Tolerance: 0~+5W



#### SMBB Technology

Better light trapping and current collection to improve module power output and reliability



#### Reduced Hot Spot Loss

Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.



#### PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



#### Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



#### Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.




#### High Energy Generation, Low LCOE

Low Pmax temp coefficient increases energy production

### Superior Warranty

- 15-year material & technology warranty
- 25-year linear power output warranty

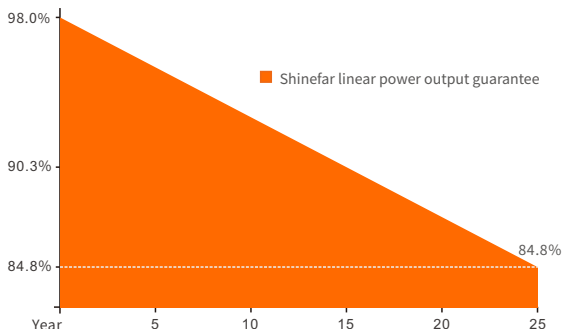


### Comprehensive Products and System Certificates

- IEC/EN61215-1:2021 & IEC/EN61215-2:2021
- IEC/EN61730-1:2016 & IEC/EN61730-2:2016
- UL61730-1:2017 & UL61730-2:2017
- UL61215-1:2017 & UL61215-2:2017
- IEC 61701:2020-Saltmist
- IEC 62716:2013-Ammonia
- IEC 62804:2020-PID
- IECEE Certificate Body (CB)
- UKCA:EN61730-2018
- ISO9001 & ISO14001 & ISO45001



## Engineering Drawings

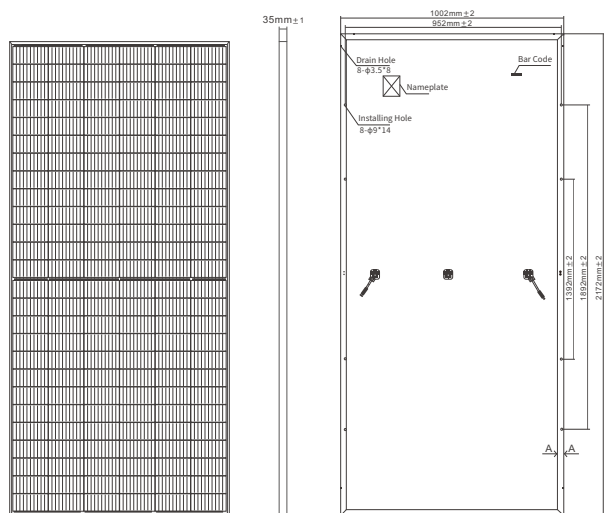

Front

Side

Back

## Structural Parameter

Dimensions of Module	2172×1002×35mm
Weight	22.5kg
Packing	31PCS/Pallet, 738PCS/40HQ
Glass	High Transparency Solar Glass 3.2mm
Backsheet	White
Frame	Anodized Aluminum Alloy & Custom Color Accepted
J-Box	IP68 Rated
Cable	4.0mm <sup>2</sup> , 300mm
Bypass Diodes	3PCS
Wind/ Snow Load	2400Pa/5400Pa
Connector	MC4 Compatible

## Electrical Specification

(STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5G — NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind speed 1m/s)

Module Type	SF-M15L/156440		SF-M15L/156445		SF-M15L/156450		SF-M15L/156455	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (P <sub>max</sub> ) [W]	440	326.48	445	330.19	450	333.90	455	337.61
Maximum Power Voltage (V <sub>mp</sub> ) [V]	44.07	40.99	44.27	41.17	44.47	41.36	44.67	41.54
Maximum Power Current (I <sub>mp</sub> ) [A]	9.98	7.97	10.05	8.02	10.12	8.07	10.19	8.13
Open Circuit Voltage (V <sub>oc</sub> ) [V]	53.29	49.56	53.49	49.75	53.69	49.93	53.89	50.12
Short Circuit Current (I <sub>sc</sub> ) [A]	10.44	8.33	10.49	8.37	10.55	8.42	10.60	8.46
Module Efficiency [%]	20.22		20.45		20.68		20.91	
Cell Type [mm]	Mono 158.75±1.5×79.375±1.5, 156 Cells							
Operational Temperature [°C]	-40~+85°C							
Maximum System Voltage	1500V DC							
Max Series Fuse Rating	15A							

## Temperature Ratings

Nominal Operating Cell Temperature	45±2°C
Temperature Coefficient of I <sub>sc</sub>	+0.06%/°C
Temperature Coefficient of V <sub>oc</sub>	-0.30%/°C
Temperature Coefficient of P <sub>max</sub>	-0.39%/°C

## Curve Diagram

