


# SF-M16/G144

## 445-460W

### 166×83mm cells 72

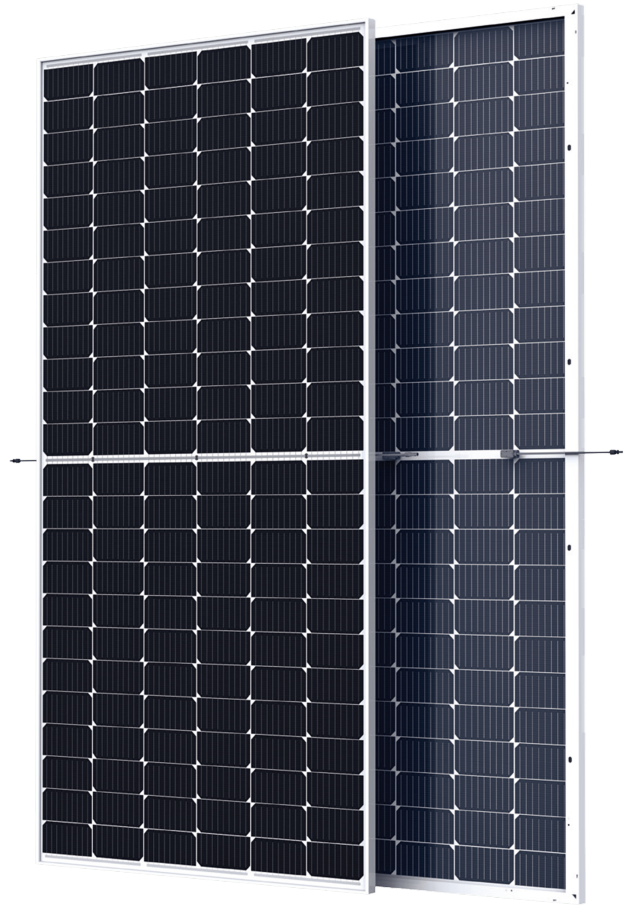

### Bifacial Double Glass

### PERC Half-Cell Module

Max Power out: 460W

Max Efficiency: 21.16%

Power Tolerance: 0~+5W



#### SMBB Technology

Better light trapping and current collection to improve module power output and reliability



#### PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



#### Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



#### Reduced Hot Spot Loss

Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.



#### Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




#### High energy generation, low LCOE

Low Pmax temp coefficient increases energy production

### Superior Warranty

- 15-year material & technology warranty
- 30-year linear power output warranty

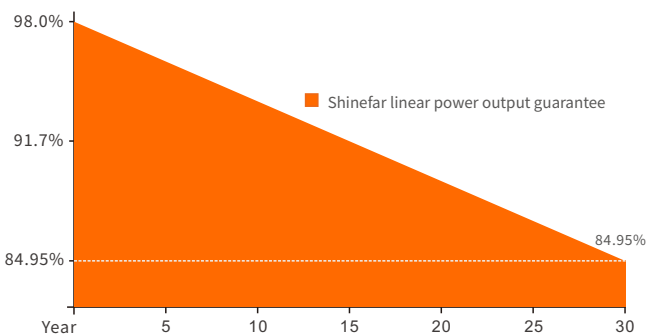


### Comprehensive Products and System Certificates

- IEC/EN61215-1:2021 & IEC/EN61215-2:2021
- IEC/EN61730-1:2016 & IEC/EN61730-2:2016
- UL61730-1:2017 & UL61730-2:2017
- UL61215-1:2017 & UL61215-2:2017
- IEC 61701:2020-Saltmist
- IEC 62716:2013-Ammonia
- IEC 62804:2020-PID
- IECCE CertificateBody (CB)
- UKCA:EN61730-2018
- ISO9001 & ISO14001 & ISO45001



## Engineering Drawings

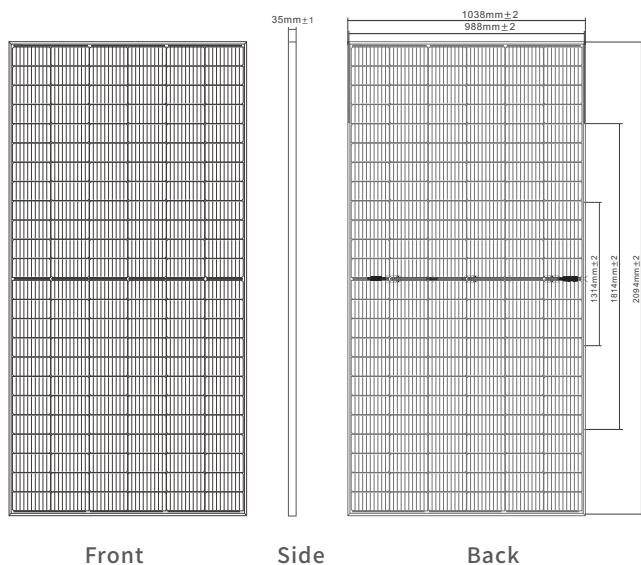

## Structural parameter

Dimensions of Module	2094x1038x35mm
Weight	28.5kg
packing	31/pallet,748/40hq
Front Glass	High Transparency Solar Glass 2.0mm
Back Glass	Heat Strengthened Glass 2.0mm
Frame	Anodized aluminum alloy & Custom color accepted
J-Box	IP68 Rated
Cable	4.0mm <sup>2</sup> , 300mm
Bypass Diodes	3pcs
Wind/ Snow Load	2400Pa/5400Pa
Connector	MC4 Compatible

## Electrical Specification

(STC: Irradiance 1000W/m<sup>2</sup>, cell temperature 25°C, AM1.5G — NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind speed 1m/s)

Module Type	SF-M16/G144445		SF-M16/G144450		SF-M16/G144455		SF-M16/G144460	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax) [W]	445	330.19	450	333.90	455	337.61	460	341.32
Maximum Power Voltage (Vmp) [V]	41.20	38.69	41.40	38.88	41.60	39.07	41.80	39.26
Maximum Power Current (Imp) [A]	10.80	8.53	10.87	8.59	10.94	8.64	11.00	8.69
Open Circuit Voltage (Voc) [V]	49.78	46.63	49.98	46.82	50.18	47.02	50.38	47.22
Short Circuit Current (Isc) [A]	11.27	8.93	11.33	8.97	11.39	9.02	11.44	9.06
Module Efficiency[%]	20.47		20.70		20.93		21.16	
Cell Type[mm]	Mono 166×83, 144 cells							
Operational Temperature[°C]	-40~+85°C							
Maximum System Voltage	1500V DC							
Max Series Fuse Rating	20A							

## Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

	490	495	501	506
Total Equivalent power (Pmax) [Wp]	490	495	501	506
Maximum Power Voltage (Vmp) [V]	41.20	41.40	41.60	41.80
Maximum Power Current (Imp) [A]	11.88	11.96	12.03	12.11
Open Circuit Voltage (Voc) [V]	49.78	49.98	50.18	50.38
Short Circuit Current (Isc) [A]	12.40	12.46	12.53	12.58
Irradiance ratio (rear/front)	10%			

## Temperature Ratings

Nominal Operating Cell Temperature	45±2°C
Temperature Coefficient of Isc	+0.06%/°C
Temperature Coefficient of Voc	-0.30%/°C
Temperature Coefficient of Pmax	-0.39%/°C

## Curve Diagram

