

# SF-M21/G132

## 660-675W

### 210×105mm cells 66


#### Bifacial Double Glass

#### PERC Half-Cell Module

Max Power out: 675W

Max Efficiency: 21.73%

Power Tolerance: 0~+5W

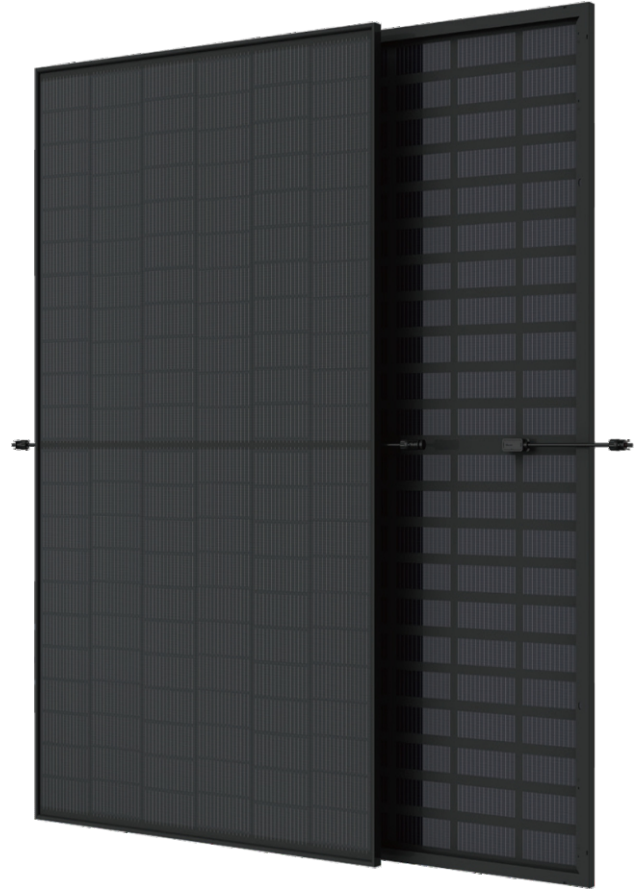

#### SMBB Technology

Better light trapping and current collection to improve module power output and reliability



#### PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



#### Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



#### Reduced Hot Spot Loss

Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.



#### Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




#### High energy generation, low LCOE

Low Pmax temp coefficient increases energy production

### Superior Warranty

- 15-year material & technology warranty
- 30-year linear power output warranty

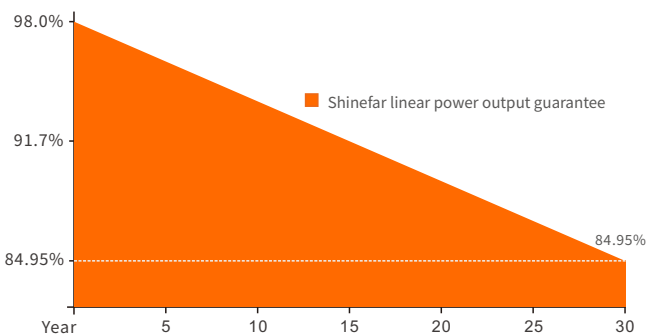


### Comprehensive Products and System Certificates

- IEC/EN61215-1:2021 & IEC/EN61215-2:2021
- IEC/EN61730-1:2016 & IEC/EN61730-2:2016
- UL61730-1:2017 & UL61730-2:2017
- UL61215-1:2017 & UL61215-2:2017
- IEC 61701:2020-Saltmist
- IEC 62716:2013-Ammonia
- IEC 62804:2020-PID
- IECCE CertificateBody (CB)
- UKCA:EN61730-2018
- ISO9001 & ISO14001 & ISO45001



## Engineering Drawings

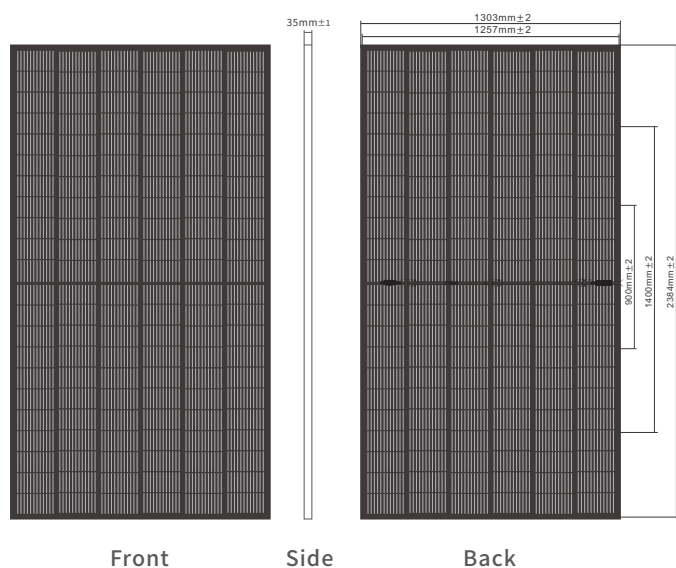

## Structural Parameter

Dimensions of Module	2384x1303x35mm
Weight	41kg
Packing	31/pallet, 558/40hq
Front Glass	High Transparency Solar Glass 2.0mm
Back Glass	Heat Strengthened Glass 2.0mm
Frame	Black, Anodized aluminium alloy
J-Box	IP68 Rated
Cable	4.0mm <sup>2</sup> , 300mm
Bypass Diodes	3pcs
Wind/ Snow Load	2400Pa/5400Pa
Connector	MC4 Compatible

## Electrical Specification

(STC: Irradiance 1000W/m<sup>2</sup>, cell temperature 25°C, AM1.5G — NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind speed 1m/s)

Module Type	SF-M21/G132660		SF-M21/G132665		SF-M21/G132670		SF-M21/G132675	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax) [W]	660	500	665	503	670	507	675	511
Maximum Power Voltage (Vmp) [V]	37.80	35.27	38.00	35.45	38.20	35.64	38.40	35.83
Maximum Power Current (Imp) [A]	17.46	14.16	17.50	14.20	17.54	14.23	17.58	14.26
Open Circuit Voltage (Voc) [V]	45.70	43.05	45.90	43.24	46.10	43.43	46.30	43.61
Short Circuit Current (Isc) [A]	18.52	14.88	18.56	14.91	18.59	14.94	18.63	14.97
Module Efficiency [%]	21.25		21.41		21.57		21.73	
Cell Type [mm]	Mono 210x105,132 cells							
Operational Temperature [°C]	-40~+85°C							
Maximum System Voltage	1500V DC							
Max Series Fuse Rating	30A							

## Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

	729	735	740	746
Total Equivalent power (Pmax) [Wp]	729	735	740	746
Maximum Power Voltage (Vmp) [V]	37.80	38.00	38.20	38.40
Maximum Power Current (Imp) [A]	19.29	19.34	19.38	19.42
Open Circuit Voltage (Voc) [V]	45.70	45.90	46.10	46.30
Short Circuit Current (Isc) [A]	20.46	20.50	20.54	20.58
Irradiance ratio (rear/front)	10%			

## Temperature Ratings

Nominal Operating Cell Temperature	45±2°C
Temperature Coefficient of Isc	+0.05%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.35%/°C

## Curve Diagram

