

SF-M18/120

480-495W

182±1.5×91±1.5mm

Cells 120


Bifacial Single Glass

N-TYPE Half-Cell Module

Max Power Out: 495W

Max Efficiency: 22.90%

Power Tolerance: 0~+5W

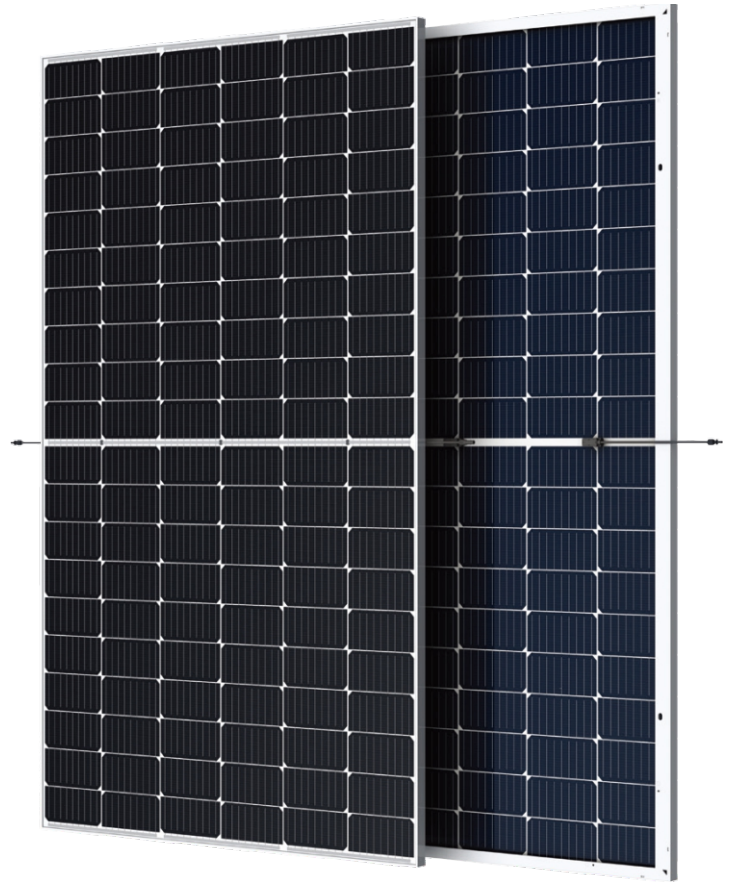

SMBB Technology

Better light trapping and current collection to improve module power output and reliability



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



Reduced Hot Spot Loss

Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




High Energy Generation, Low LCOE

Low Pmax temp coefficient increases energy production

Superior Warranty

- 15-year material & technology warranty
- 30-year linear power output warranty

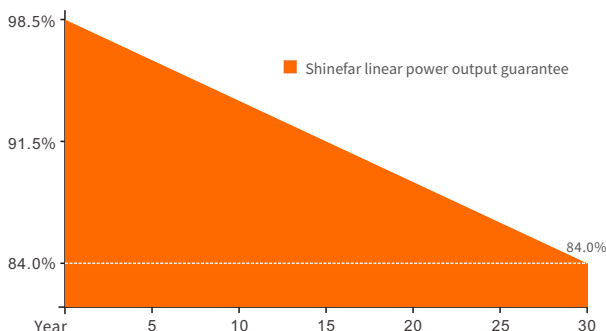


Comprehensive Products and System Certificates

- IEC/EN61215-1:2021 & IEC/EN61215-2:2021
- IEC/EN61730-1:2016 & IEC/EN61730-2:2016
- UL61730-1:2017 & UL61730-2:2017
- UL61215-1:2017 & UL61215-2:2017
- IEC 61701:2020-Saltmist
- IEC 62716:2013-Ammonia
- IEC 62804:2020-PID
- IECEE Certificate Body (CB)
- UKCA:EN61730-2018
- ISO9001 & ISO14001 & ISO45001



Engineering Drawings

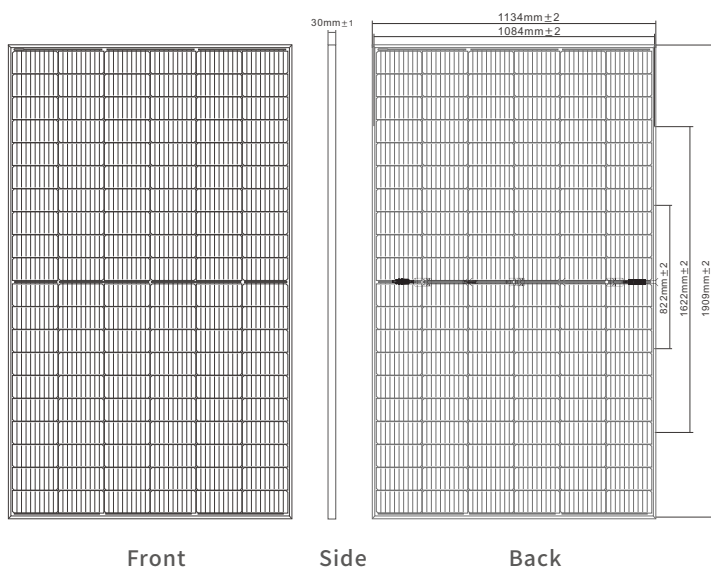

Structural Parameter

Dimensions of Module	1909×1134×30mm
Weight	23.6kg
Packing	37PCS/Pallet, 888PCS/40HQ
Front Glass	High Transparency Solar Glass 3.2mm
Back Glass	Transparent or Transparent Grid
Frame	Anodized Aluminum Alloy & Custom Color Accepted
J-Box	IP68 Rated
Cable	4.0mm ² , 300mm
Bypass Diodes	3PCS
Wind/ Snow Load	2400Pa/5400Pa
Connector	MC4 Compatible

Electrical Specification

(STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5G — NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s)

Module Type	SF-M18/120480		SF-M18/120485		SF-M18/120490		SF-M18/120495	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax) [W]	480	356.16	485	359.87	490	363.58	495	367.29
Maximum Power Voltage (Vmp) [V]	35.38	32.90	35.53	33.04	35.68	33.18	35.83	33.32
Maximum Power Current (Imp) [A]	13.57	10.82	13.65	10.89	13.73	10.96	13.82	11.02
Open Circuit Voltage (Voc) [V]	42.26	39.30	42.41	39.44	42.56	39.58	42.71	39.72
Short Circuit Current (Isc) [A]	14.26	11.38	14.33	11.43	14.39	11.48	14.46	11.54
Module Efficiency [%]	22.21		22.44		22.67		22.90	
Cell Type [mm]	Mono 182±1.5×91±1.5, 120 Cells							
Operational Temperature [°C]	-40~+85°C							
Maximum System Voltage	1500V DC							
Max Series Fuse Rating	25A							

Electrical Characteristics With Different Power Bin (Reference to 10% Irradiance Ratio)

Total Equivalent Power (Pmax) [Wp]	528	534	539	545
Maximum Power Voltage (Vmp) [V]	35.38	35.53	35.68	35.83
Maximum Power Current (Imp) [A]	14.92	15.02	15.11	15.20
Open Circuit Voltage (Voc) [V]	42.26	42.41	42.56	42.71
Short Circuit Current (Isc) [A]	15.69	15.76	15.83	15.90
Irradiance Ratio (Rear/Front)	10%			

Temperature Ratings

Nominal Operating Cell Temperature	45±2°C
Temperature Coefficient of Isc	+0.05%/°C
Temperature Coefficient of Voc	-0.23%/°C
Temperature Coefficient of Pmax	-0.30%/°C

Curve Diagram

